

368


MADE IN USA.

2-way sound systems
<http://csppro.com/p/368.asp>

368 products have extraordinary dynamic response, especially in the low-frequency performance, the outbreak of the dynamic completely, so that you could imagine.

Mini-box design, but also reflects the professional level CSP professional audio products.

2-way sound systems, special Flying Version. The 368 loudspeaker yields 90 degrees horizontal coverage at 90 degrees vertical.

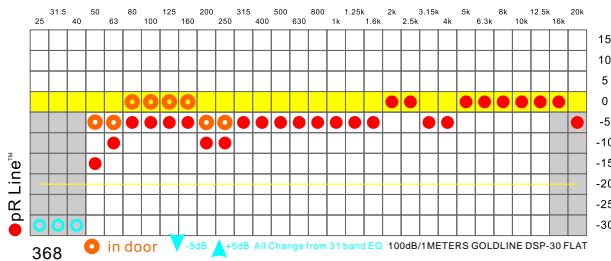

SPECIFICATIONS:

System Type: 2-way, Full range, bass ported	Drivers: LF (1 x Csp 12LV2x) HF (1 x Csp H452)
Frequency Range: 60 Hz - 20 kHz (-10 dB) 80 Hz - 20 kHz (+/-3 dB)	High Frequency Driver Protection: none
Power Capacity: 300 W Continuous 1200 W Peak	Input Connection: One two-terminal barrier strip input connectors
Recommended Power Amplifier: PaulAudio 202	Enclosure Hardware: 3/4" MDF wood, UPWEJ Special black polyurea finish
Sensitivity (1w/1m): 98 dB	Grille: 18 gauge perforated steel, additional powder coated
Maximum Output: 128.8 dB	Dimensions (H x W x D): 19.375" x 14.375" x 13.75" 432 mm x 365 mm x 349 mm
Nominal Impedance: 8 Ohms	Weight: 37 lbs (16 kg)
Nominal Dispersion: 90° x 90°	Shipping weight: 40 lbs (18 kg)
Crossover: T5r368	

APPLICATIONS:

- Sound Reinforcement
- Clubs, Karaoke Clubs, Health Clubs
- Offices, Classrooms, Meeting Rooms
- A/V Systems
- Houses of Worship
- Sport Facilities
- Distributed Systems

FEATURES:

- Lv2 Technology, Flying version
- High power handling - 300 watts(average) and 1200 watts(peak) power capacity
- 90° x 90° horn designed for even coverage and smooth response on and off axis
- 1" Titanium HF Driver
- The advanced network topology crossover design shapes the frequency response to deliver coherent summation in the crossover region
- 3/4" MDF wood, UPWEJ Special(Ultrachrome Protecting wood enclosures) black polyurea finish
- 18 gauge perforated steel, additional powder coated
- Manufactured with Pride in the United States

Csp Professional
5157 Cliffwood Dr., Montclair, CA 91763 USA
info@csppro.com
All information is Copyright © 2005 Csp

www.csppro.com

368

Csp